

CHAMP 20W

Emergency Batten 600mm


dynamic series

Efficient. Cutting Edge. Reliable


The CHAMP 20W Emergency Batten has been introduced specifically to be used as a temporary batten on construction sites.

3W, 5W, and a 10W emergency version available.

Comes with a 1.5m lead and 3-pin plug. The active is bridged.



IP65

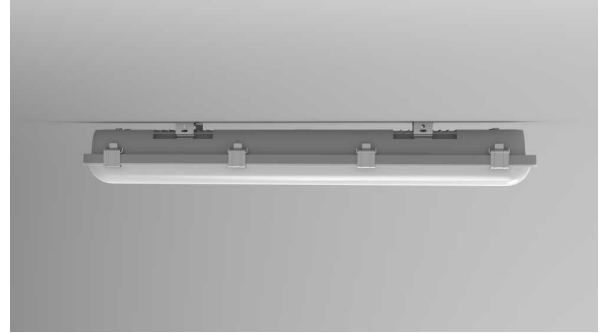

SPECIFICATIONS

Material Specifications

Housing	Grey Moulded PC Body, Clear PC Diffuser
Material	304 Stainless Clips
Dimensions	600mm(L) x 80mm(W) x 72mm(H)
Impact Rating	IK08
Ingress Protection	IP65
Weight	1.3kg
Warranty	3 Years

Electrical Specifications

Power Supply	Integrated 25W Non-Dim Driver
Input Voltage	240V 50/60Hz
Connection Method	1.5m lead + AU 3-pin plug
Operating Temperature (Ta)	-20°C to +50°C

Optic Specifications

Light Source	Epistar SMD2835
Delivered Lumens	2400lm
CRI	80Ra
Beam Angle	120°
Colour Deviation	SDCM ≤ 3
Reported L70 (Hours)	> 54,000 Hrs

VARIATIONS

LC5380	CHAMP 20W Batten (3W Emergency), CO-D32, C90-D32, 4000K
LC5382	CHAMP 20W Batten (5W Emergency), CO-D80, C90-D50, 4000K
LC5381	CHAMP 20W Batten (10W Emergency), CO-D160, C90-D100, 4000K
LC5381C	CHAMP 20W Batten (10W Emergency), CO-D160, C90-D100, 4000K