

# DEX 120W

## Industrial Streetlight

**dynamic series**

Efficient. Cutting Edge. Reliable

The Dex Streetlight Range is designed for exterior applications where design and style matters. Suited for carpark, boardwalks and common thoroughfares.

The state-of-the-art DEX 120W LED Streetlight is equipped with Epistars highly efficient LEDs. Based on the reliability and long life of LEDs, and the elimination of lamp replacements, this significantly reduces maintenance requirements providing unprecedented cost savings. Photometric Files Available online.



### SPECIFICATIONS

#### Material Specifications


Colour	Corrosion Resistant Powder Coat, Black
Ingress Protection	IP65
Impact Rating	IK09
Dimensions	700mm x 280mm x 112mm
Spigot Size	65mm (Dia)
Weight	5.2kg
Warranty	5 Year Replacement

#### Electrical Specifications

Power Supply	Integral Sosen Driver, Non-Dimmable
Input Voltage	240V
Connection Method	Hard Wiring Required
Operating Temperature (Ta)	-25°C to +45°C

#### Optic Specifications

Light Source	2pcs x 60W Epistar COB
Delivered Lumens	15,266lm
CRI	80Ra
Beam Angle	150°
Rated Lifetime (L70B20)	40,000 Hrs

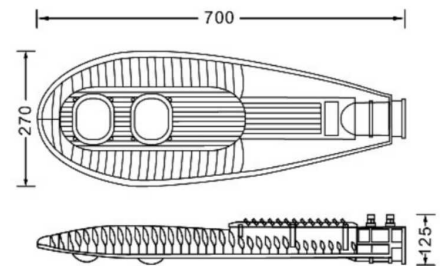

### VARIATIONS

LC6524	DEX 120W LED Streetlight, Black, Non-Dim, 3000K
LC6503	DEX 120W LED Streetlight, Black, Non-Dim, 5700K