

PLUTO 150W

Premium Grade Highbay

The PLUTO 150W LED High Bay lighting is suitable for coolrooms, sports centres and industrial applications. It has a compact design with slim housing. Replacing outdated, inefficient metal halide high bay lighting with LED lighting will significantly reduce your overall lighting power consumption.

Instant start, no warm up time or restrike delay. Easy-installation for fast retrofitting. Reduce your energy bills and maintenance costs. Suitable for dry, damp and wet locations.



SPECIFICATIONS

Material Specifications


Material	Aluminium Die-cast Housing, Tempered Glass
Colour	Anti-Corrosion AkzoNobel Black Powdercoat
Ingress Protection	IP66
Impact Rating	IK09
Dimensions	330mm (Dia) x 180mm (H)
Accessories	Hoop Hook - Suspension Not Included
Weight	4.52Kg
Warranty	7 Year Replacement

Electrical Specifications

Power Supply	150W Integral Meanwell HBG Series, 3300mA
Dimming	Dali, 1-10V Available
Input Voltage	240VAC, 50/60Hz
Operating Temperature (Ta)	-40°C to + 50°C
Connection Method	Australian 2-Pin Plug & 2.0m Lead

Optic Specifications

Light Source	210 x Lumileds Luxeon 3030 LED
Efficacy	150lm/W
Colour Deviation	SDCM <3
CRI	82Ra
Rated Lifetime (L70B50)	75,000 Hrs

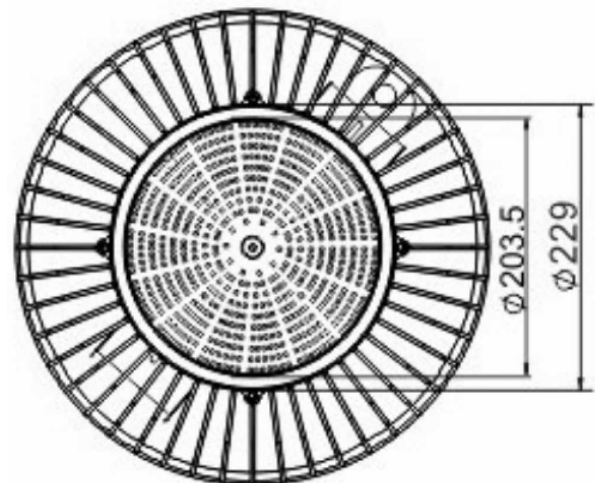

VARIATIONS

LC2368	PLUTO 150W Premium LED Highbay, 120°, Non-Dim, 3000K, 23,400lm
LC2369	PLUTO 150W Premium LED Highbay, 120°, Non-Dim, 4000K, 24,000lm
LC2365	PLUTO 150W Premium LED Highbay, 120°, Non-Dim, 5700K, 25,800lm