

# LIQUID 3

## Commercial Downlight 90mm

The LIQUID 90mm Downlight is used in commercial applications where style and class is important. Used in schools, hospitals, corridors and IP65 Rated for wet areas. Direct output with a 60° beam angle. With a customisable output, it is available with an output of 5W-9W.



**IP65**



**CLO  
Output**



### SPECIFICATIONS

#### Material Specifications


<b>Material</b>	Aluminium Diecast Housing / Clear Diffuser
<b>Finish</b>	Smooth Powder Coat White Trim
<b>Dimensions</b>	103mm (Face Dia) x 58mm (H)
<b>Cutout</b>	90mm
<b>Ingress Protection</b>	IP65
<b>Warranty</b>	5 Year Replacement

#### Electrical Specifications

<b>Power Supply</b>	Tridonic TRIAC
<b>Connection Method</b>	Australian Flex & Plug
<b>Options</b>	DALI, CLO Programmed Output
<b>Operating Temperature (Ta)</b>	-20°C to +40°C

#### Optic Specifications

<b>Light Source</b>	Philips COB LED
<b>Delivered Lumens</b>	375lm - 675lm NFC Programmable
<b>CRI</b>	90+Ra
<b>Beam Angle</b>	60°
<b>Reported L70 (Hours)</b>	> 50,000 Hrs

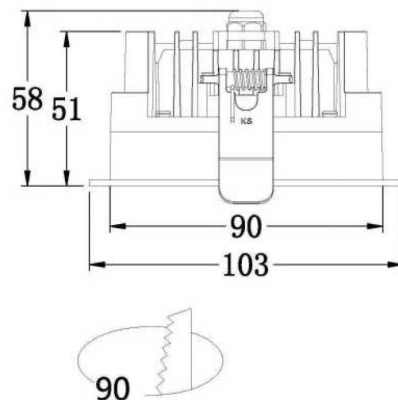

### VARIATIONS

<b>DL03-3-27K</b>	LIQUID 3, 5-9W Downlight, White, Phase Dim, 2700K
<b>DL03-3-3K</b>	LIQUID 3, 5-9W Downlight, White, Phase Dim, 3000K
<b>DL03-3-35K</b>	LIQUID 3, 5-9W Downlight, White, Phase Dim, 3500K
<b>DL03-3-4K</b>	LIQUID 3, 5-9W Downlight, White, Phase Dim, 4000K
<b>DL03-3-5K</b>	LIQUID 3, 5-9W Downlight, White, Phase Dim, 5000K