


LIQUID 8

Commercial Downlight 200mm

The LIQUID 8-50W Commercial Downlight is used in commercial applications where style and class is important. Used in schools, hospitals, corridors and IP65 Rated for wet areas. Direct output with a 60° beam angle. Customisable output between 8 and 50W.



IP65



**CLO
Output**



SPECIFICATIONS

Material Specifications


Material	Aluminium Die-cast Housing / Clear Diffuser
Finish	Smooth Powder Coat White Trim
Dimensions	226mm (Face Dia) x 96mm (H)
Cutout	200mm
Ingress Protection	IP65
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Tridonic Fixed Output (NFC Programmable)
Connection Method	Australian Flex & Plug
Operating Temperature (Ta)	-20°C to +40°C

Optic Specifications

Light Source	CITIZEN COB LED
CRI	90Ra
Beam Angle	60°
Delivered Lumens	680lm - 4250lm
Reported L70 (Hours)	> 50,000 Hrs

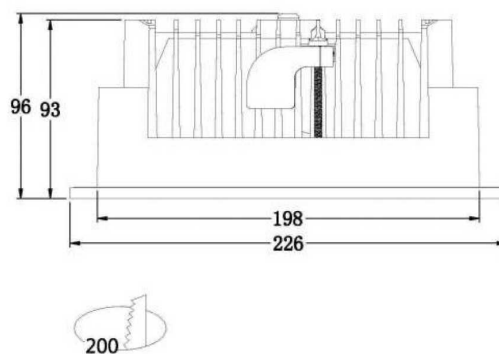

VARIATIONS

DL03-8-27K	LIQUID 8, 8-50W Commercial Downlight, White, Phase Dim, 2700K
DL03-8-3K	LIQUID 8, 8-50W Commercial Downlight, White, Phase Dim, 3000K
DL03-8-35K	LIQUID 8, 8-50W Commercial Downlight, White, Phase Dim, 3500K
DL03-8-4K	LIQUID 8, 8-50W Commercial Downlight, White, Phase Dim, 4000K
DL03-8-5K	LIQUID 8, 8-50W Commercial Downlight, White, Phase Dim, 5000K