

RAVEN 35W

Exterior Wall Light

dynamic series

Efficient. Cutting Edge. Reliable

The RAVEN flood light series launches as the completely re-engineered LED version of our globally popular wall light. We are using an extrusion production method for the RAVEN series ensuring higher and more accurate heat dissipation. Sleek, angular, technical and powerful lighting solution. RAVEN is suitable for lighting footpaths, car parks, building facades, entrances, under canopies and signs.

Verified by Techlume Australia on 31/05/2023



IP54



SPECIFICATIONS

Material Specifications


Material	Aluminium Triangle Extrusion, Polycarbonate
Colour	Charcoal Powdercoat
Dimensions	176mm x 134mm x 320mm(L)
Ingress Protection	IP54
Impact Rating	IK10
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Tridonic LC 38/700/54 fixC Ip SNC2 (Integral)
Input Voltage	240V
Connection Method	Hard Wiring, Large Internal Cavity

Optic Specifications

Light Source	Osram LED 2835, Linear PCB
Delivered Lumens	2,845lm (3000K)
Delivered Lumens	3,392lm (4000K)
Delivered Lumens	2,959lm (6000K)
Beam Angle	90°
CRI	>83Ra
Colour Deviation	SDCM ≤ 3
Reported L70 (Hours)	> 54,000 Hrs

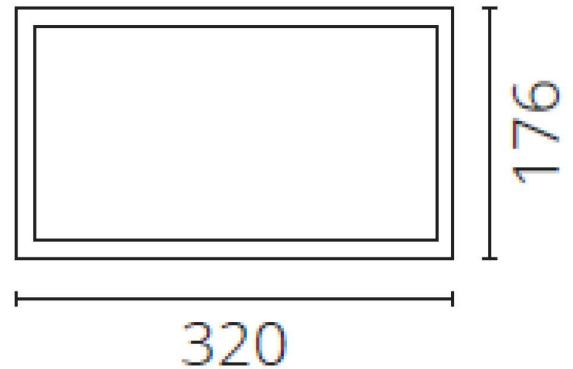

VARIATIONS

LC4231	RAVEN 35W Outdoor Floodlight 300mm, Charcoal, 90°, Non-Dim, Tri-colour
LC4230	RAVEN 35W Outdoor Floodlight, 300mm, Charcoal, 90°, Non-Dim, 4000K