

# VERTEX MK-II 1350W

## 1350W Industrial Floodlight

**Classic Series**

Proven. Quality. Customisable

The VERTEX Floodlights are designed for flexibility in high output situations. The VERTEX MK-II 1350W Industrial Floodlight is suitable for mounting heights of up to 30 metres. The robust construction with a high lumen output enables optimum light spread for high light requirements. The updated design is more compact, for less wind force, and an improved bracket design.



**IP66**



### SPECIFICATIONS

#### Material Specifications


<b>Material</b>	Die-Cast Aluminium Housing
<b>Finish</b>	AkzoNobel Powder Coat
<b>Dimensions</b>	628mm (W) x 910mm (H) x 275mm (D)
<b>Windage</b>	0.140m <sup>2</sup> at 20° tilt
<b>Maximum Projected Area</b>	0.481m <sup>2</sup>
<b>Ingress Protection</b>	IP66
<b>Impact Rating</b>	IK10
<b>Weight</b>	44.3 kg (including drivers)
<b>Weight</b>	26.2kg (without drivers)
<b>Warranty</b>	5 Year Replacement

#### Electrical Specifications

<b>Power Supply</b>	4 x Meanwell HLG-320 Drivers
<b>Input Voltage</b>	240V (5 amps)
<b>Max Distance From Power Supply</b>	50m
<b>Connection Method</b>	Drivers can be remoted mounted

#### Optic Specifications

<b>Light Source</b>	1350W Lumileds Luxeon
<b>Calculated L70 (Hours)</b>	155,000 Hrs
<b>Calculated L80 (Hours)</b>	97,000 Hrs
<b>Calculated L90 (Hours)</b>	46,000 Hrs

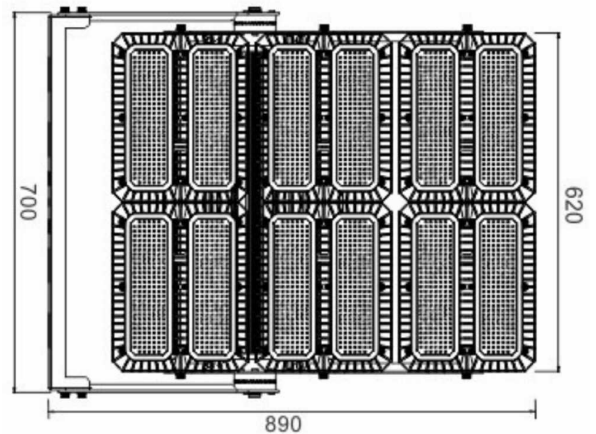

### VARIATIONS

<b>LC6473</b>	VERTEX 1350W Floodlight, Black, 15°, Non-Dim, 5700K, 172,600lm
<b>LC6474</b>	VERTEX 1350W Floodlight, Black, 25°, Non-Dim, 5700K, 206,800lm
<b>LC6475</b>	VERTEX 1350W Floodlight, Black, 60°, Non-Dim, 5700K, 206,800lm
<b>LC6476</b>	VERTEX 1350W Floodlight, Black, 110°, Non-Dim, 5700K, 210,700lm