



# TECHLUME

A U S T R A L I A

## LM-79 Test Report

Testing Method:	IES Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products
Relevant Standards:	IES LM-79-08
Test Date and Time:	19/06/2023 11:37:41 AM
Test Location:	Techlume Australia - East Goderich Street Deloraine, TAS 7304
Operator:	Johnny Elmer
Measurement Number:	VFR-230619-0102-MS
Measurement Method:	Far Field, Type C Horizontal
Measurement Distance:	463.6 cm

### Equipment Used

System Name:	LabSpion Goniometer
Sensor Name / Model:	Viso LabSensor Model2 / Freedom VIS (Custom Viso)
Spectrometer Range:	360 nm – 830 nm
Calibration Date:	7/12/2022
Flicker Meter Type:	Viso Systems LabFlicker
Manufacturer:	Viso Systems, Denmark

### Test Conditions

Ambient Temperature:	25 °C ± 1 °C
----------------------	--------------

### Remarks

The results stated in this report represent the tested sample only. All photometric and colourimetric data has been measured in compliance with IES LM-79-08 standards.



## Product Overview

Product Description:


LENNOX 32W Floodlight, 4000K, 90x40°, IP66, Black, Non-Dim

Item Number:

LC2502

Manufacturer:

Decrolux Lighting Pty Ltd

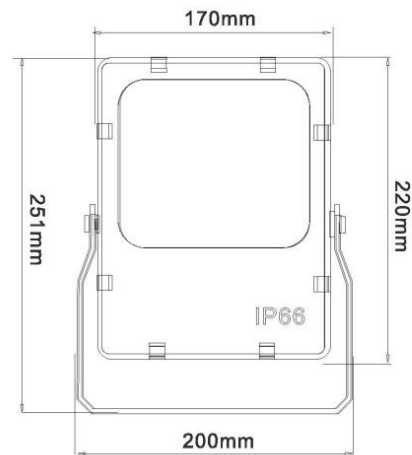

## Photometric Measurements

Total Luminous Flux	Luminous Efficacy	Luminous Intensity
4752 lm	151 Lumen/watt	4162 cd

Correlated Colour Temperature, Target	Correlated Colour Temperature, Measured	Colour Rendering Index (CRI)
4000 K	3950 K	Ra 72.5


## Electrical Measurements

Input Voltage	Input Current	Input Power	Input Voltage Frequency
240 VAC	0.138 A	31.5 W	60 Hz


Power Factor	Stabilisation Time	Stabilisation Variation	Hours Operated Prior to Test
0.95	Lamp stabilized in 57 min 20 sec	-1.9%	0 hours



### Spectral Power Distribution (SPD)

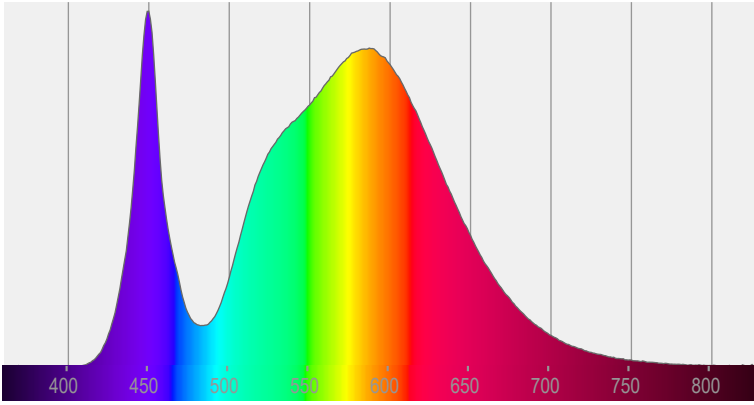

### Input Power Curve

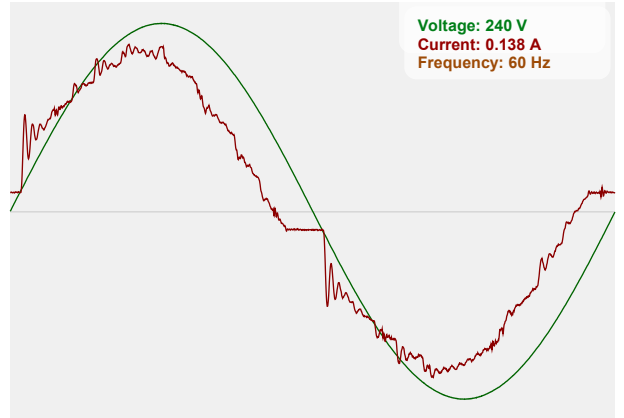



### Flicker Details

Flicker Sample Rate	Flicker Percentage	Flicker Frequency	Flicker Index
20000 sample/s	68.58%	119.76 Hz	0.23

Flicker SVM Value	Flicker PstLM Value	Measurement Time (PstLM)	Measurement Time (all other indices)
2.57	0.08	180 s	1.2 s

### IEEE 1789 Frequency/Modulation Plot

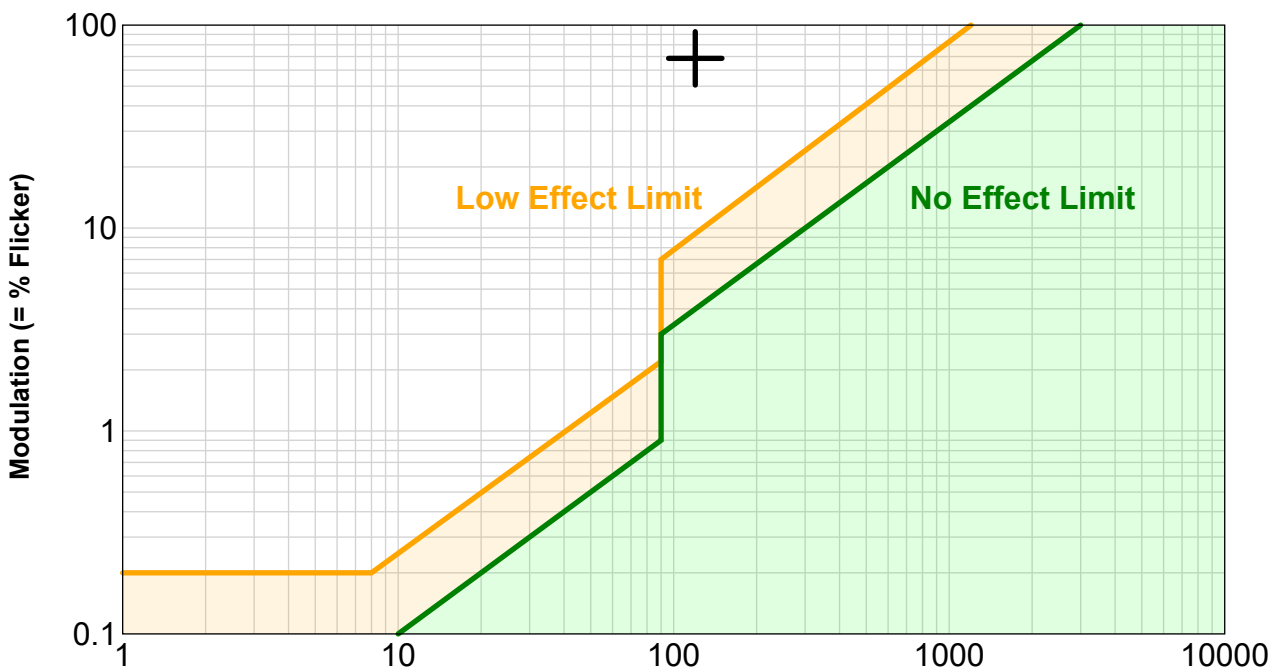

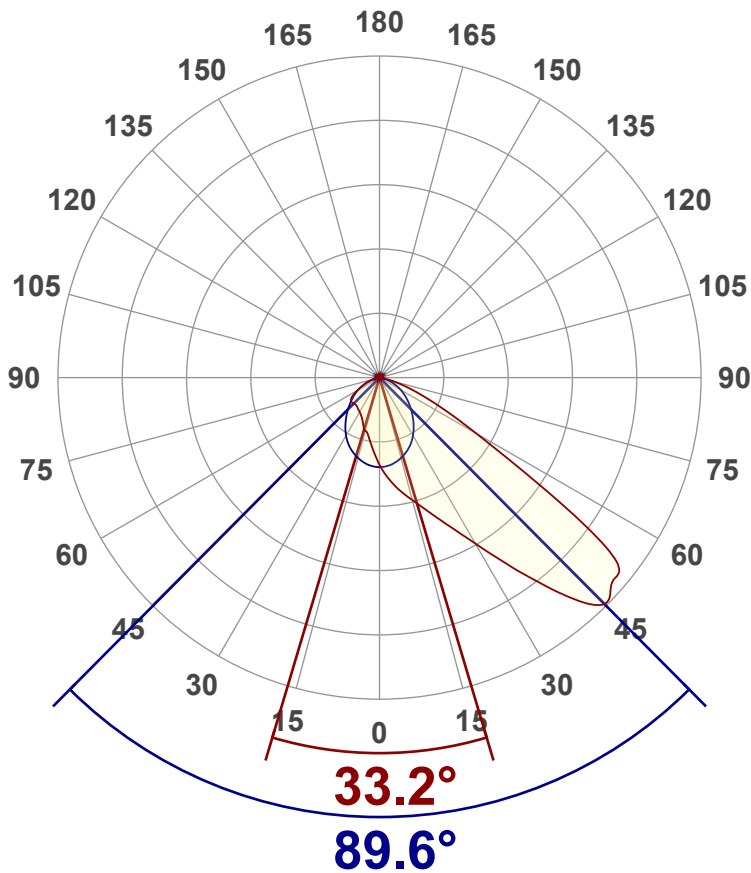**Angular Distribution – 0° / 90° Plane**

**Main Values**

<b>Total Lumen Output</b>	4752 lm
<b>Lumen Up%</b>	0.14%
<b>Lumen Down%</b>	99.86%
<b>Peak Intensity</b>	4162 cd
<b>Beam Angle (90%)</b>	89.6°

**Cut-off Angle**


<b>Average 2.5%</b>	157.6°
---------------------	--------

**Field Angle**

<b>Average 10%</b>	138.7°
--------------------	--------

**Intensity Ratio**

<b>In 120° Cone</b>	83.5%
<b>In 90° Cone</b>	48.5%

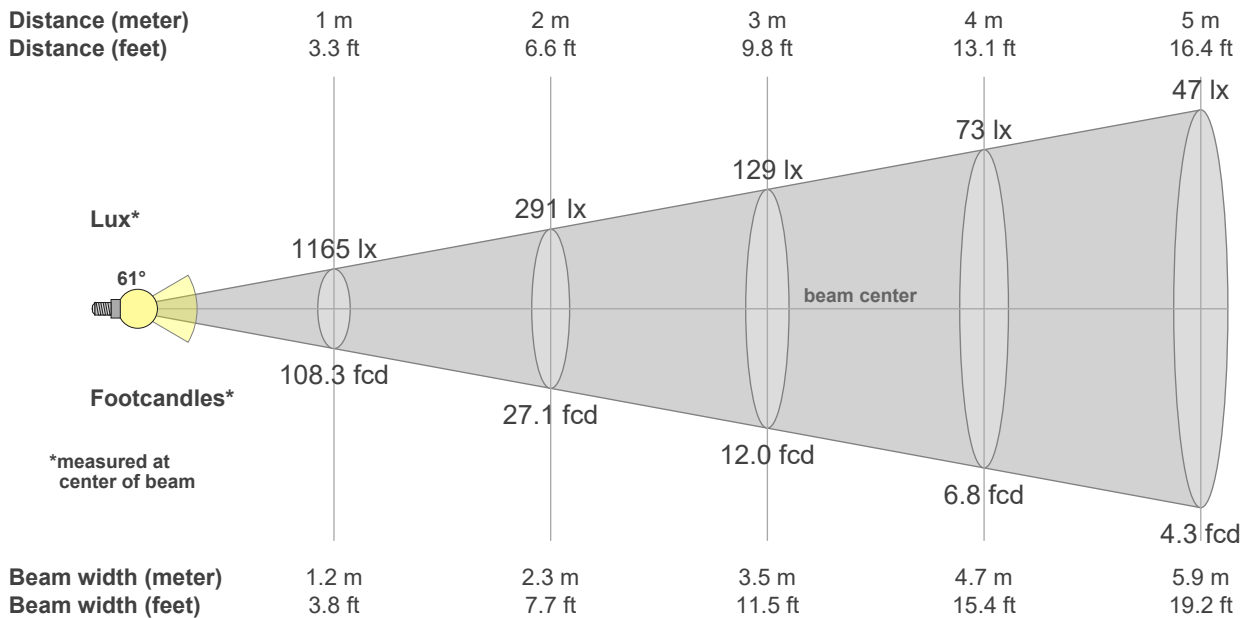**C000-C180**
**C090-C270**

**Beam intensities from 1 – 20m**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
1165	291	129	73	47	32	24	18	14	12	10	8	7	6	5	5	4	4	3	3	lux
108.3	27.1	12	6.8	4.3	3	2.2	1.7	1.3	1.1	0.9	0.8	0.6	0.6	0.5	0.4	0.4	0.3	0.3	0.3	fc




### Colour Details

Colour Rendering Index (CRI)	Colour Rendering Index R9 Value	Colour Rendering TM30-18
Ra 72.5	R9 = -29.8	R <sub>f</sub> 75.4, R <sub>g</sub> 93.9

Colour Quality Scale	Correlated Colour Temperature, Target	Correlated Colour Temperature, Measured
CQS = 72.8	CCT = 4000 K	CCT = 3950 K

MacAdam Steps	Colour Coordinates CIE 1931	Colour Deviation from BBL
SDCM = 3.1	(x;y) = (0.381;0.377)	Duv = 0.0033


### Colour Rendering Index per reference colour (CIE 1995)

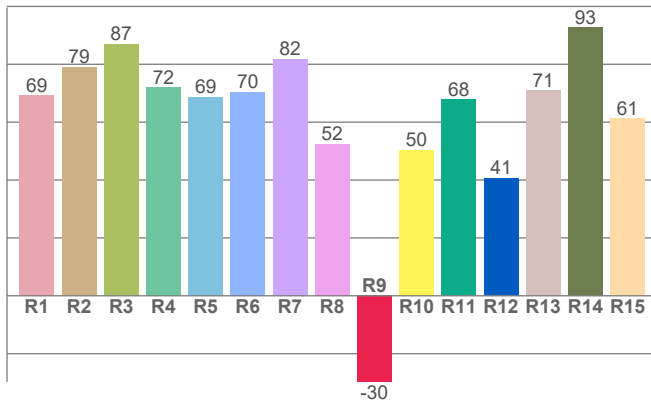

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
69.2	79.0	87.1	72.0	68.6	70.4	81.7	52.4	-29.8	50.4	67.9	40.7	70.9	92.6	61.2


### TM30-18 R<sub>f</sub>-values per hue bin

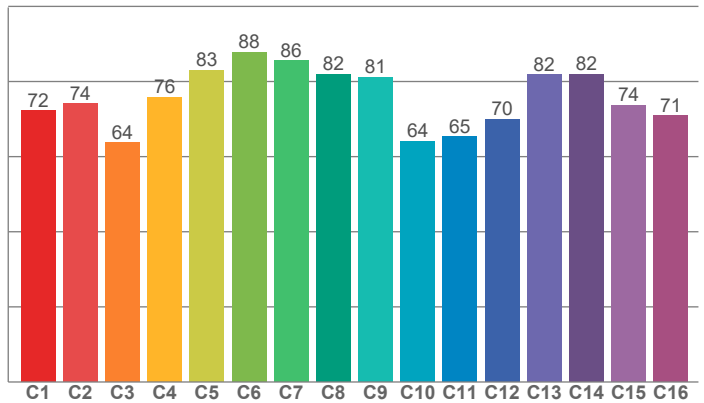


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
72.3	74.1	63.7	75.9	83.0	87.8	85.5	82.0	81.1	64.1	65.3	70.0	81.9	82.0	73.6	70.9


### CIE 1931

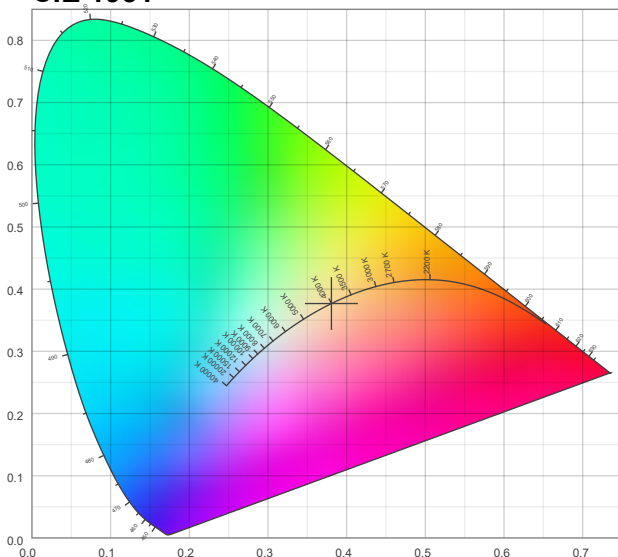

### CIE 1931 – Zoomed

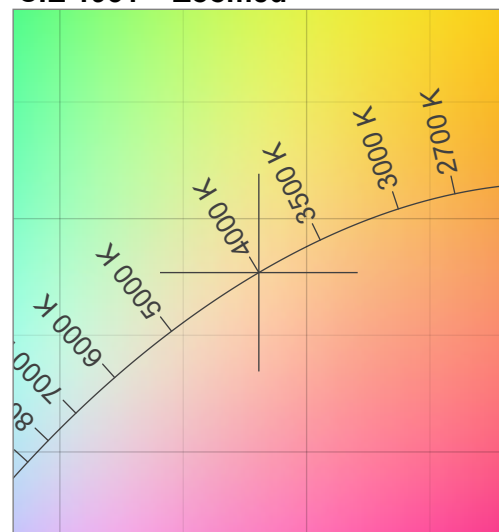


**Iso-intensity Diagram (Iso-Candela)**

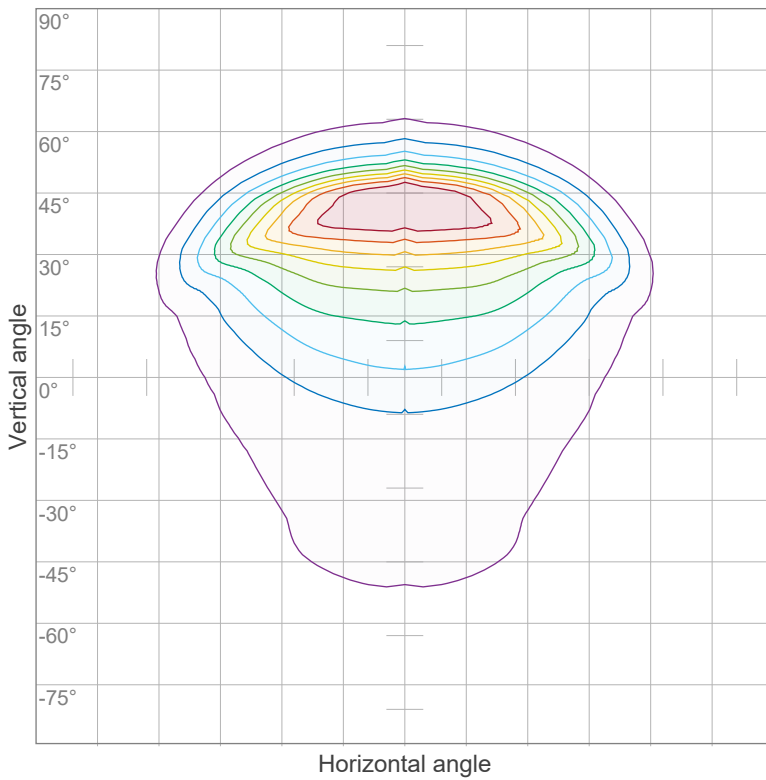

90 %	3739.5 cd
80 %	3324.0 cd
70 %	2908.5 cd
60 %	2493.0 cd
50 %	2077.5 cd
40 %	1662.0 cd
30 %	1246.5 cd
20 %	831.0 cd
10 %	415.5 cd

Peak intensity: 4155.0 cd  
Number of c-planes: 72

**Iso-illuminance Diagram (Iso-lux)**

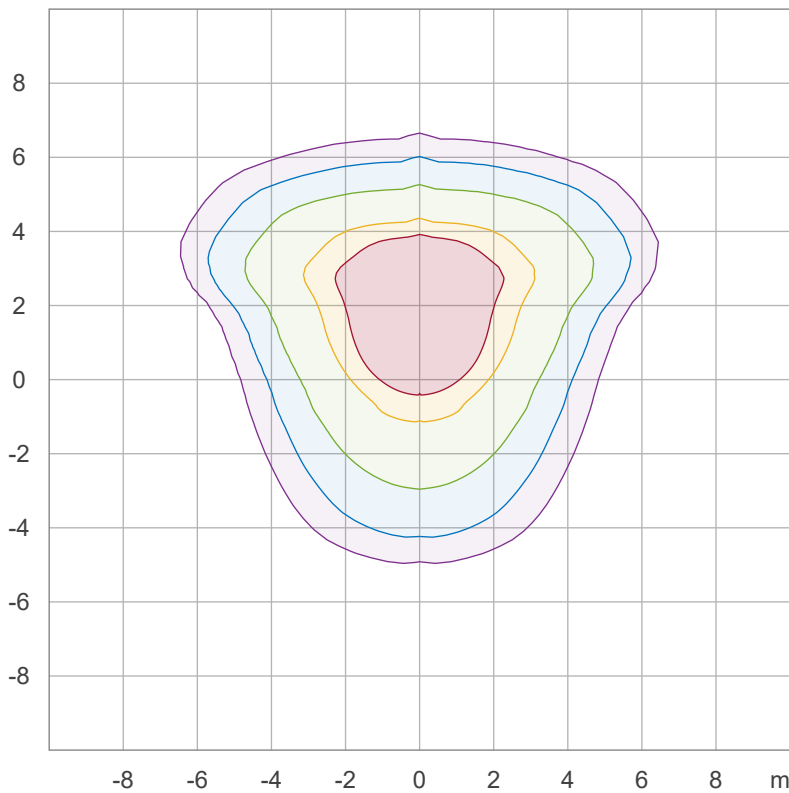

50.0 %	95.2 lx
30.0 %	57.1 lx
10.0 %	19.0 lx
5.0 %	9.5 lx
3.0 %	5.7 lx

Peak illuminance: 190.3 lx  
Mounting height: 3.0 m  
Number of c-planes: 72



## Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	107	103	99	96	98	95	92	94	92	90	91	89	87	85
2	99	91	84	79	97	89	83	78	86	80	76	82	78	74	79	76	72	70
3	90	79	71	65	87	78	70	64	75	68	63	72	66	62	69	65	61	58
4	82	70	61	54	79	68	60	53	66	58	53	63	57	52	61	56	51	49
5	75	61	52	45	72	60	52	45	58	50	44	56	49	44	54	48	43	41
6	68	55	45	39	66	54	45	38	52	44	38	50	43	38	48	42	37	35
7	63	49	40	33	61	48	39	33	46	39	33	45	38	33	44	37	32	30
8	58	44	35	29	57	43	35	29	42	34	29	41	34	29	40	33	29	27
9	54	40	32	26	53	39	31	26	38	31	26	37	30	25	36	30	25	23
10	50	37	28	23	49	36	28	23	35	28	23	34	27	23	33	27	23	21

