

BLAIZE 18W LED 300x300mm

Square Panel Light

Classic Series

Proven. Quality. Customisable

The BLAIZE 300x300 LED Panel Light is at the leading edge of commercial lighting. Suitable for surface mounting, or recessed or suspended. Eliminate maintenance costs, and enjoy a high efficiency light source. Dimmable Driver available. This LED panel light is a brilliant light that offers high performance combined with affordability and sustainability.

Verified by Techlume Australia on 22/03/2023



IP44



SPECIFICATIONS

Material Specifications


Material	White Aluminium Frame. PMMA
Dimensions	295mm x 295mm x 12mm
Ingress Protection	IP44
Weight	2.2Kg
Options	Surface Mount, Plaster Recess & Suspension Kits
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Non-Dimmable Lifud Remote Driver
System Watts	18.2W
Connection Method	Australian 2-Pin Plug & 1.0m Lead
Input Voltage	240V

Optic Specifications

Light Source	Epistar 18W, Edge lit
Correlated Colour Temperature	Tri-colour: 3000K/4000K/5000K
Nominal Lumens	1,678lm
Efficacy	92.1lm/W
Beam Angle	120°
CRI	Ra 81
Colour Deviation	SDCM<3
Reported L70 (Hours)	> 54,000 Hrs

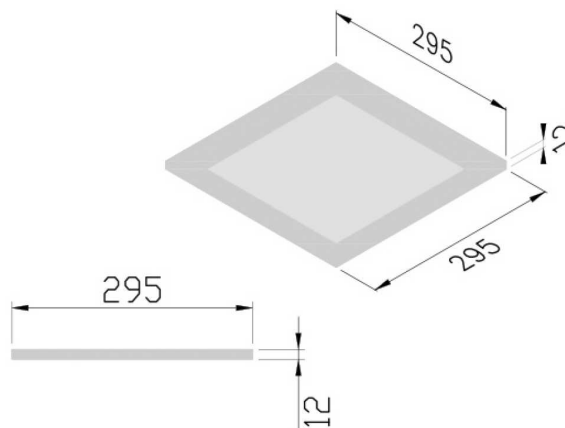

VARIATIONS

LC7024	BLAIZE 18W LED Panel Light, 300x300, White, 120°, Non-Dim, 3000K, 1,678lm
LC7025	BLAIZE 18W LED Panel Light, 300x300, White, 120°, Non-Dim, 4000K, 1,678lm
LC7026	BLAIZE 18W LED Panel Light 300x300, White, 120°, Non-Dim, Tri-colour, 1,678lm