

TITAN 65W

Weatherproof Batten 1560mm

dynamic series

Efficient. Cutting Edge. Reliable

The TITAN 65W Weatherproof Batten 1560mm has been introduced as a premium quality batten, high-efficiency, and very easy to install. The TITAN batten series is the perfect LED solution for replacing conventional fluorescent weatherproof luminaires. IP66, designed for harsh environments. This luminaire is designed to with the perfect balance of value and efficiency. SS316 Clips available.



SPECIFICATIONS

Material Specifications


| | |
|---------------------------|---------------------------------|
| Housing | Moulded PC Body, Clear PC cover |
| Material | 304 Stainless Clips |
| Dimensions | 1560mm(L) x 97mm(W) x 82mm(H) |
| Impact Rating | IK08 |
| Ingress Protection | IP66 |
| Weight | 1.7kg |
| Warranty | 5 Year Replacement |

Electrical Specifications

| | |
|-----------------------------------|---|
| Power Supply | Osram Non-Dim Driver, 350mA |
| Connection Method | 20mm Cable Gland at One end. 3 knock-out points in rear, and 1 in side. |
| Operating Temperature (Ta) | -20°C to +40°C |
| Input Voltage | 240V |

Optic Specifications

| | |
|-------------------------------|----------------------|
| Light Source | 65W LED Samsung 2835 |
| Delivered Lumens | 8059lm |
| CRI | 80Ra |
| Beam Angle | 120° |
| Colour Deviation | SDCM ≤ 3 |
| Reported L70 (Hours) | > 54,000 Hrs |
| Calculated L70 (Hours) | 129,000 Hrs |

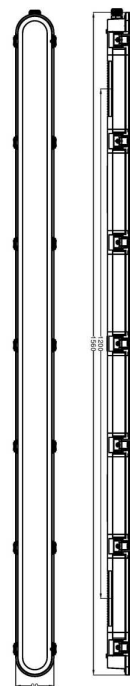

VARIATIONS

| | |
|----------------|---|
| LC5345 | TITAN 65W Weatherproof Batten, Non-Dim, 4000K |
| LC5345D | TITAN 65W Weatherproof Batten, DALI, 4000K |